

MICR: FAIL. IMAGE: FAIL.

MICR Line

Magnetic	-----# 3 2 5 5 1 6 # 3 0 # ? 5 3 6 # 0 0 6 1 7 6 1 8 # 1 0
Optical	-----# 3 2 5 5 1 6 # 3 0 # 9 5 3 6 # 0 0 6 1 7 6 1 8 # 1 0
	 60 55 50 45 40 35 30 25 20 15 10 5 0

MICR (magnetic)

Category	Error	Description
Spacing	Character spacing before position 18, too wide.	Actual 62.75, Tolerance (61.12-62.71)
Spacing	Character spacing before position 19, too wide.	Actual 65.95, Tolerance (64.29-65.88)
Spacing	Character spacing before position 20, too wide.	Actual 69.15, Tolerance (67.47-69.06)
Spacing	Character spacing before position 21, too wide.	Actual 72.31, Tolerance (70.64-72.23)
Spacing	Character spacing before position 22, too wide.	Actual 75.51, Tolerance (73.82-75.41)
Spacing	Character spacing before position 23, too wide.	Actual 78.68, Tolerance (76.99-78.58)
Spacing	Character spacing before position 24, too wide.	Actual 81.86, Tolerance (80.17-81.76)
Spacing	Character spacing before position 25, too wide.	Actual 85.02, Tolerance (83.34-84.93)
Spacing	Character spacing before position 26, too wide.	Actual 88.19, Tolerance (86.52-88.11)
Spacing	Character spacing before position 28, too wide.	Actual 94.54, Tolerance (92.87-94.46)
Spacing	Character spacing before position 29, too wide.	Actual 97.71, Tolerance (96.04-97.63)
Spacing	Character spacing before position 30, too wide.	Actual 100.88, Tolerance (99.22-100.81)
Spacing	Character spacing after position 31, too narrow.	Actual 1.56, Tolerance (2.92-3.43)
Spacing	Character spacing before position 31, too wide.	Actual 104.05, Tolerance (102.39-103.98)
Spacing	Character spacing before position 33, too wide.	Actual 4.7, Tolerance (2.92-3.43)
Spacing	Character spacing before position 35, too wide.	Actual 116.69, Tolerance (115.09-116.68)

MICR Line Fields



FIELD	START POSITION	LENGTH	ERRORS
Transaction Code	15	2	
Account Number	18	9	
Sorting Code	28	8	
Serial Number	37	8	

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 16	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

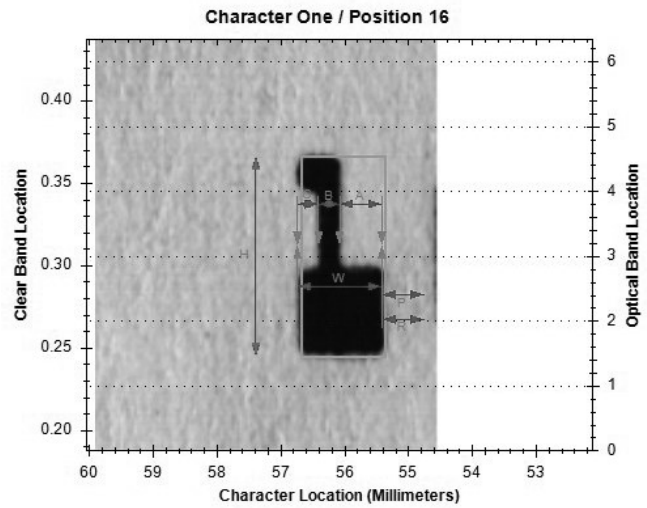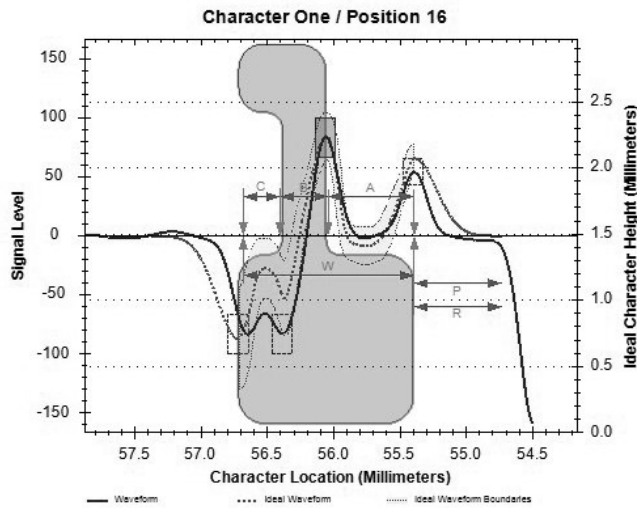

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 0

Magnetic Recognition. Signal Level 98.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.650	0.67	0.57 - 0.73	YES	
B	0.361	0.33	0.28 - 0.44	YES	
C	0.277	0.26	0.20 - 0.35	YES	
W	1.288	1.25	1.21 - 1.36	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.25	2.92 - 3.43	YES	
R	55.563	55.39	54.77 - 56.36	YES	

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.660	0.64 - 0.66	0.58 - 0.74	PASS	
B	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
C	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	1.321	1.30 - 1.32	1.24 - 1.40	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.25 - 3.28	2.92 - 3.43	PASS	
R	55.563	55.40 - 55.42	54.77 - 56.36	PASS	



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 19	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.
	Recognition	Category	Warning	Description
	Magnetic	Character Dimensions	Interval C - too wide	Actual value 1.08. Expected maximum 1.04.
	optical	Character Dimensions	Low Quality	Visual inspection recommended.

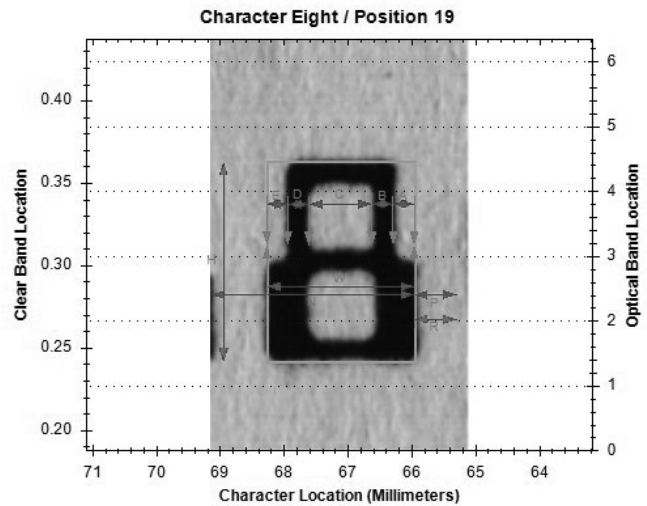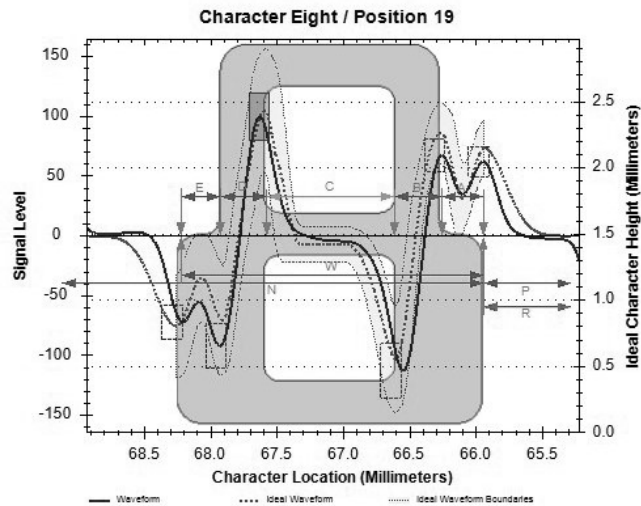

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 95.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.310	0.31	0.23 - 0.39	YES	
B	0.361	0.29	0.28 - 0.44	YES	
C	0.960	1.08	0.88 - 1.04	WARNING	+0.05
D	0.351	0.30	0.27 - 0.43	YES	
E	0.297	0.28	0.22 - 0.37	YES	
W	2.278	2.27	2.20 - 2.35	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.20	2.92 - 3.43	YES	
P	3.175	3.20	2.92 - 3.43	YES	
R	65.088	65.95	64.29 - 65.88	NO	+0.07

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.33 - 0.36	0.25 - 0.41	PASS	
B	0.330	0.25 - 0.28	0.25 - 0.41	PASS	
C	0.991	1.07 - 1.09	0.91 - 1.07	PASS	
D	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
E	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	2.311	2.31 - 2.34	2.24 - 2.39	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.20 - 3.23	2.92 - 3.43	PASS	
P	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
R	65.088	65.96 - 65.99	64.29 - 65.88	FAIL	+0.08



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 20	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

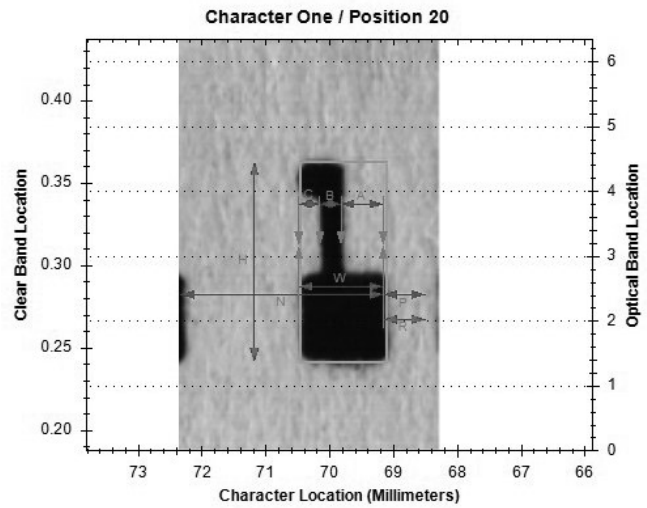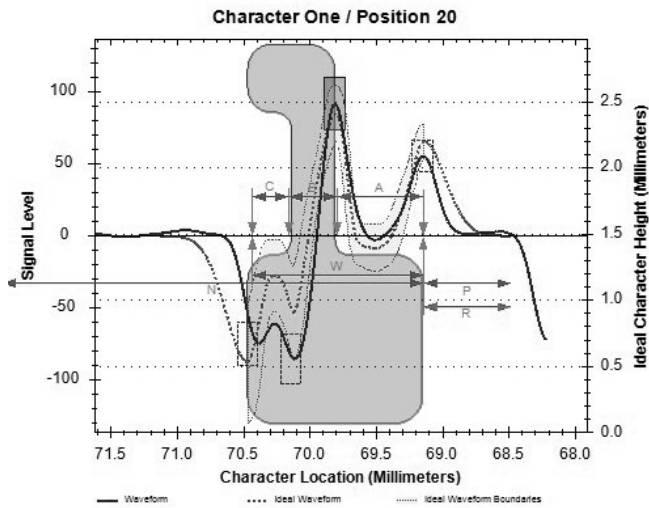

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 108.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.650	0.67	0.57 - 0.73	YES	
B	0.361	0.30	0.28 - 0.44	YES	
C	0.277	0.27	0.20 - 0.35	YES	
W	1.288	1.24	1.21 - 1.36	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.16	2.92 - 3.43	YES	
P	3.175	3.20	2.92 - 3.43	YES	
R	68.263	69.15	67.47 - 69.06	NO	+0.09

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.660	0.66 - 0.69	0.58 - 0.74	PASS	
B	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
C	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.321	1.35 - 1.37	1.24 - 1.40	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
P	3.175	3.20 - 3.23	2.92 - 3.43	PASS	
R	68.263	69.16 - 69.19	67.47 - 69.06	FAIL	+0.11



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 21	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

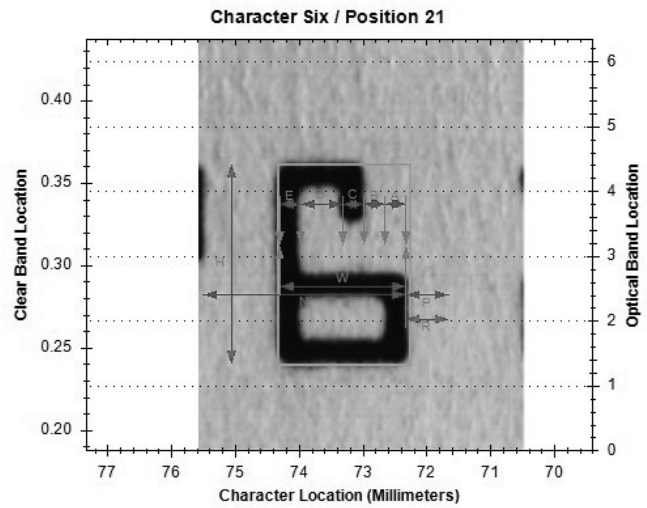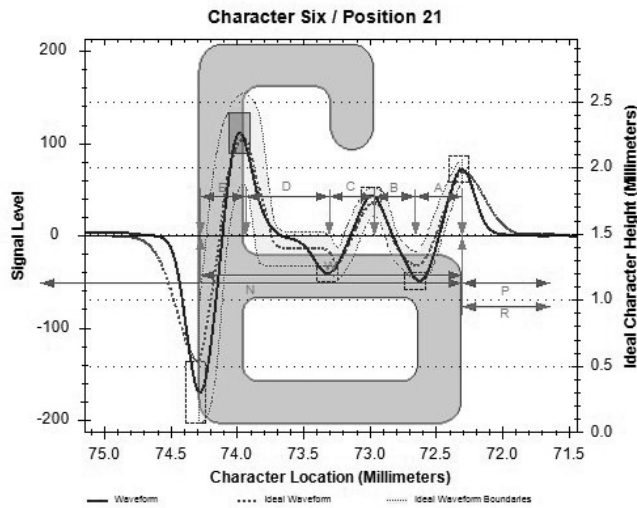

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 106.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.32	0.27 - 0.43	YES	
B	0.310	0.36	0.23 - 0.39	YES	
C	0.340	0.33	0.26 - 0.42	YES	
D	0.630	0.67	0.55 - 0.71	YES	
E	0.340	0.30	0.26 - 0.42	YES	
W	1.971	1.98	1.89 - 2.05	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.21	2.92 - 3.43	YES	
P	3.175	3.16	2.92 - 3.43	YES	
R	71.438	72.31	70.64 - 72.23	NO	+0.08

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.33 - 0.36	0.25 - 0.41	PASS	
B	0.330	0.33 - 0.36	0.25 - 0.41	PASS	
C	0.330	0.36 - 0.38	0.25 - 0.41	PASS	
D	0.660	0.61 - 0.64	0.58 - 0.74	PASS	
E	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.981	2.06 - 2.08	1.91 - 2.06	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
P	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
R	71.438	72.31 - 72.34	70.64 - 72.23	FAIL	+0.10



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 22	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

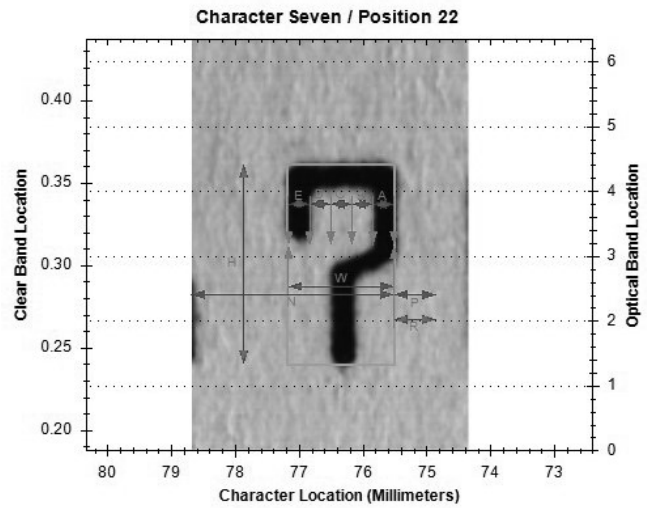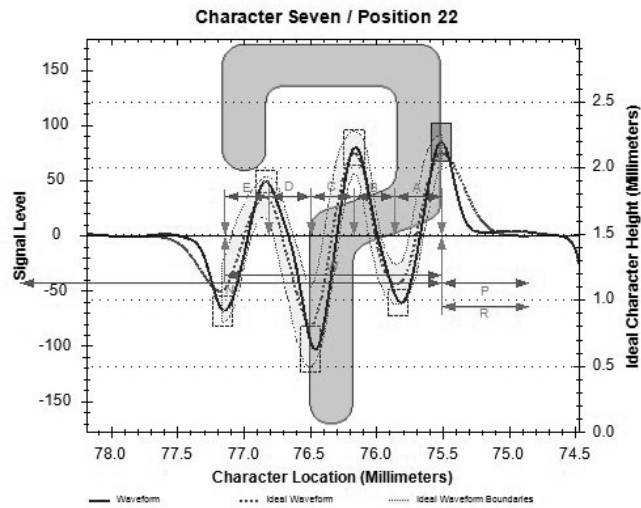

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 113.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.30	0.27 - 0.43	YES	
B	0.310	0.35	0.23 - 0.39	YES	
C	0.320	0.30	0.24 - 0.40	YES	
D	0.320	0.38	0.24 - 0.40	YES	
E	0.330	0.31	0.25 - 0.41	YES	
W	1.631	1.64	1.55 - 1.71	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.17	2.92 - 3.43	YES	
P	3.175	3.21	2.92 - 3.43	YES	
R	74.613	75.51	73.82 - 75.41	NO	+0.11

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
C	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
D	0.330	0.38 - 0.41	0.25 - 0.41	PASS	
E	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.651	1.68 - 1.70	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
P	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
R	74.613	75.51 - 75.54	73.82 - 75.41	FAIL	+0.12



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 23	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

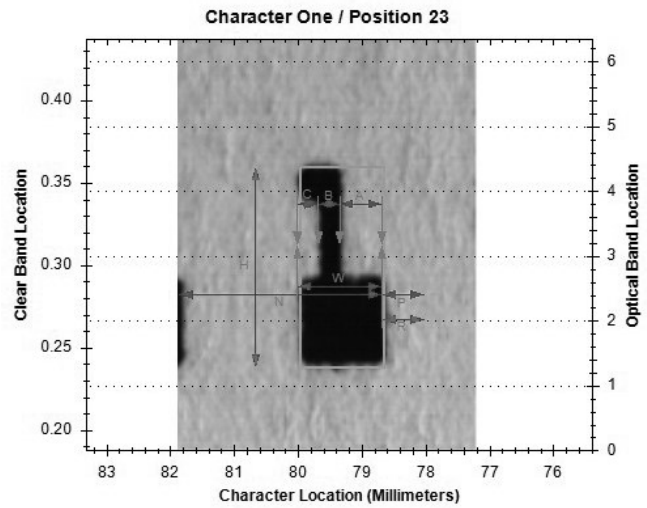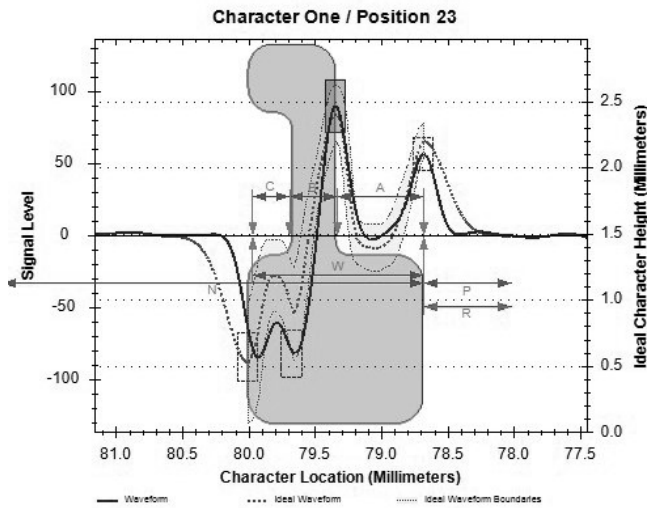

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 106.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.650	0.67	0.57 - 0.73	YES	
B	0.361	0.30	0.28 - 0.44	YES	
C	0.277	0.28	0.20 - 0.35	YES	
W	1.288	1.25	1.21 - 1.36	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.18	2.92 - 3.43	YES	
P	3.175	3.17	2.92 - 3.43	YES	
R	77.788	78.68	76.99 - 78.58	NO	+0.10

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.660	0.66 - 0.69	0.58 - 0.74	PASS	
B	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
C	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	1.321	1.30 - 1.32	1.24 - 1.40	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
P	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
R	77.788	78.69 - 78.71	76.99 - 78.58	FAIL	+0.11




(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 24	Recognition optical	Category Character Dimensions	Error Tall Character	Description Actual value 3.07. Expected maximum 3.05.
	Recognition Magnetic	Category Character Dimensions	Warning Low Quality	Description Visual inspection recommended; see waveform and ideal waveform boundaries.

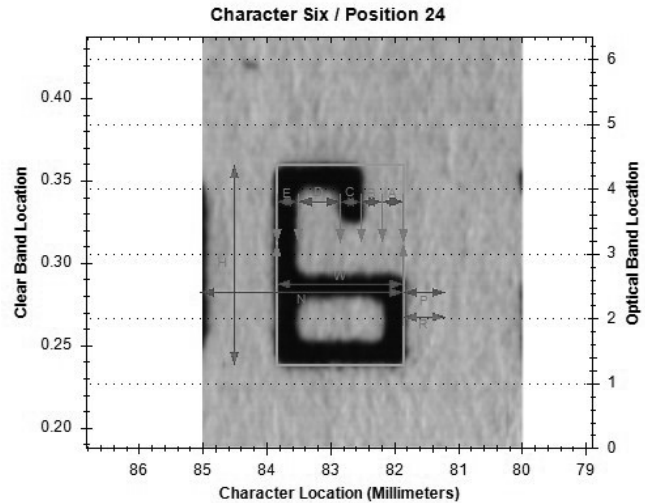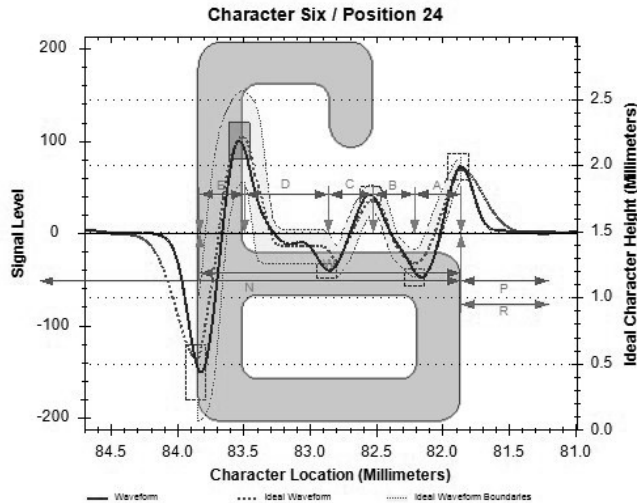

Magnetic Recognition. Signal Level 96.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.30	0.27 - 0.43	YES	
B	0.310	0.39	0.23 - 0.39	YES	
C	0.340	0.30	0.26 - 0.42	YES	
D	0.630	0.68	0.55 - 0.71	YES	
E	0.340	0.29	0.26 - 0.42	YES	
W	1.971	1.96	1.89 - 2.05	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.15	2.92 - 3.43	YES	
P	3.175	3.18	2.92 - 3.43	YES	
R	80.963	81.86	80.17 - 81.76	NO	+0.11

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
B	0.330	0.36 - 0.38	0.25 - 0.41	PASS	
C	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
D	0.660	0.69 - 0.71	0.58 - 0.74	PASS	
E	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.981	1.98 - 2.01	1.91 - 2.06	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.12 - 3.15	2.92 - 3.43	PASS	
P	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
R	80.963	81.86 - 81.89	80.17 - 81.76	FAIL	+0.11



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 25	Recognition optical	Category Character Dimensions	Error Tall Character	Description Actual value 3.07. Expected maximum 3.05.
	Recognition Magnetic	Category Character Dimensions	Warning Interval B - too wide	Description Actual value 1.77. Expected maximum 1.67.
	optical	Character Dimensions	Wide Character	Actual value 2.41. Expected maximum 2.39.

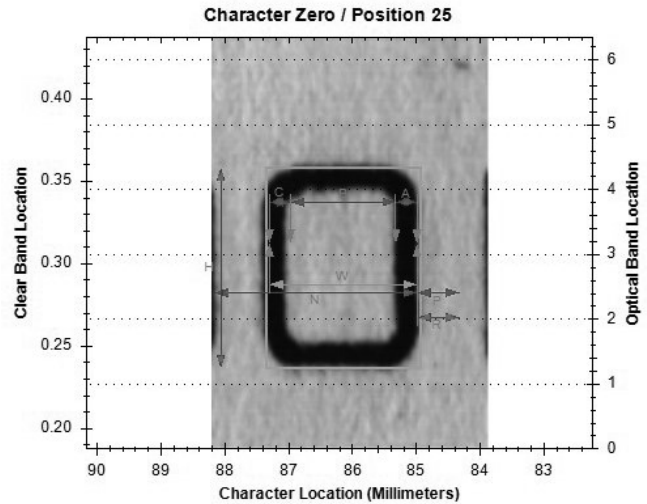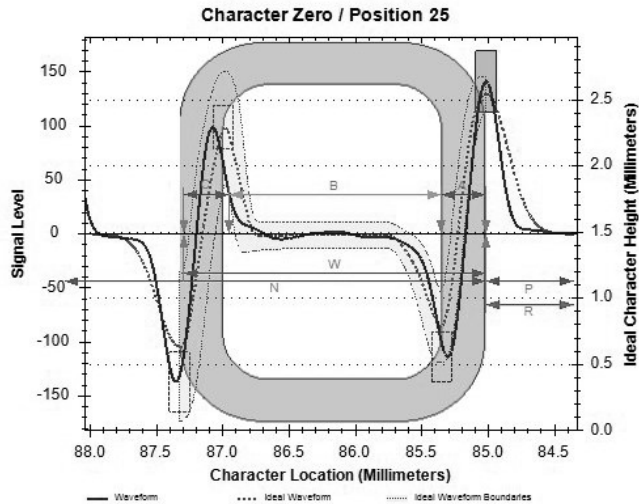

Magnetic	3 2 5 5 1 6 3 0 3 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 3 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 108.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.340	0.29	0.26 - 0.42	YES	
B	1.598	1.77	1.52 - 1.67	WARNING	+0.10
C	0.340	0.28	0.26 - 0.42	YES	
W	2.278	2.34	2.20 - 2.35	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.17	2.92 - 3.43	YES	
P	3.175	3.15	2.92 - 3.43	YES	
R	84.138	85.02	83.34 - 84.93	NO	+0.09

(*) Magnetic Dimensions (measuread in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.




Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	1.651	1.73 - 1.75	1.57 - 1.73	PASS	
C	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	2.311	2.41 - 2.44	2.24 - 2.39	WARNING	+0.03
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
P	3.175	3.12 - 3.15	2.92 - 3.43	PASS	
R	84.138	84.99 - 85.01	83.34 - 84.93	FAIL	+0.06

(*) Optical Dimensions (measuread in millimeters)

MICR: FAIL. IMAGE: FAIL.

Position 26	Recognition optical	Category Character Dimensions	Error Tall Character	Description Actual value 3.07. Expected maximum 3.05.
	Recognition Magnetic	Category Character Dimensions	Warning Interval B - too wide	Description Actual value 1.74. Expected maximum 1.67.
	optical	Character Dimensions	Wide Character	Actual value 2.41. Expected maximum 2.39.

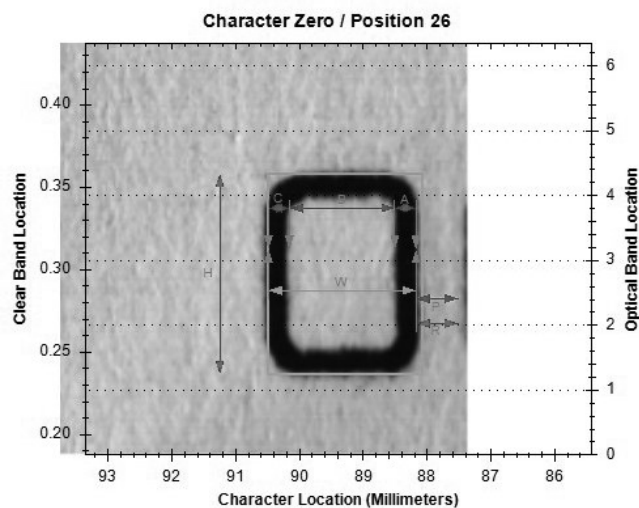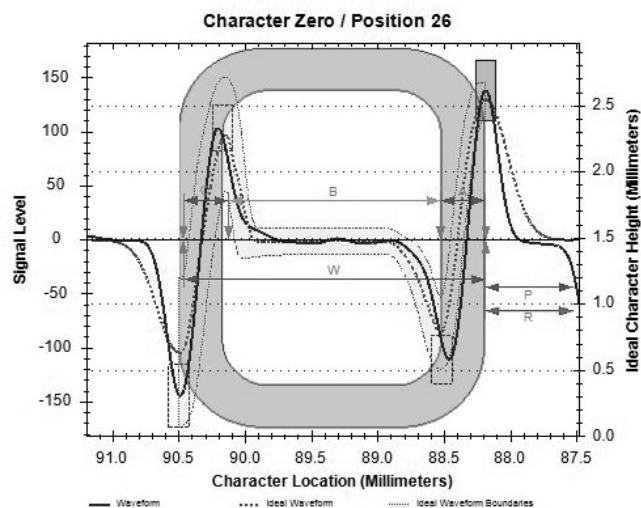

Magnetic Recognition, Signal Level 107.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.340	0.28	0.26 - 0.42	YES	
B	1.598	1.74	1.52 - 1.67	WARNING	+0.07
C	0.340	0.28	0.26 - 0.42	YES	
W	2.278	2.30	2.20 - 2.35	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.17	2.92 - 3.43	YES	
R	87,313	88,19	86,52 - 88,11	NO	+0,08

(*) Magnetic Dimensions (measuread in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.



Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
B	1.651	1.70 - 1.73	1.57 - 1.73	PASS	
C	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	2.311	2.41 - 2.44	2.24 - 2.39	WARNING	+0.03
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
R	87.313	88.16 - 88.19	86.52 - 88.11	FAIL	+0.07

(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Position 28	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.
	Magnetic	Character Dimensions	Warning	
	Magnetic	Character Dimensions	Interval B - too wide	Actual value 0.8. Expected maximum 0.76.
	Magnetic	Character Dimensions	Stroke C - too narrow	Actual value 0.56. Expected minimum 0.57.
	Magnetic	Character Dimensions	Low Quality	Visual inspection recommended; see waveform and ideal waveform boundaries.

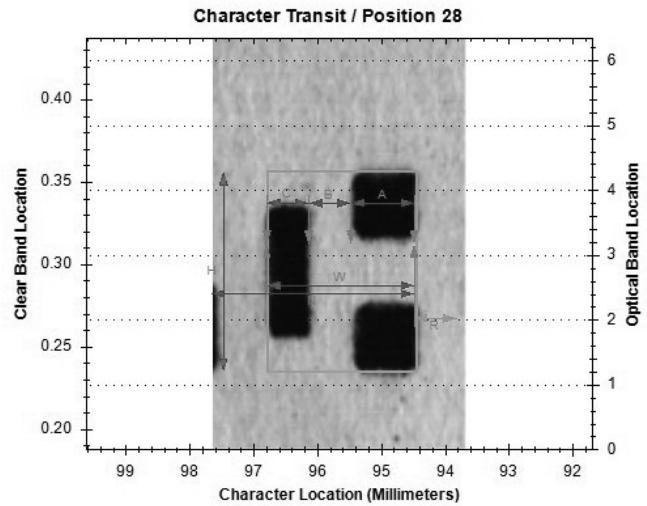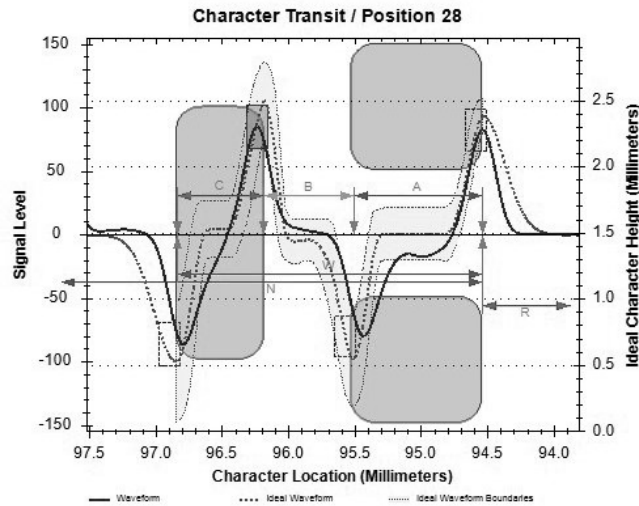

Magnetic	3 2 5 5 1 6	30	5 3 6	00 6 1 7 6 1 8	10
Optical	3 2 5 5 1 6	30	5 3 6	00 6 1 7 6 1 8	10

Magnetic Recognition. Signal Level 81.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.970	0.90	0.89 - 1.05	YES	
B	0.681	0.80	0.60 - 0.76	WARNING	+0.05
C	0.650	0.56	0.57 - 0.73	NO	-0.02
W	2.301	2.26	2.23 - 2.38	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.17	2.92 - 3.43	YES	
P	n/a	n/a	n/a - n/a	n/a	
R	93.663	94.54	92.87 - 94.46	NO	+0.08

(*) Magnetic Dimensions (measuread in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.991	0.94 - 0.97	0.91 - 1.07	PASS	
B	0.660	0.74 - 0.76	0.58 - 0.74	PASS	
C	0.660	0.56 - 0.58	0.58 - 0.74	PASS	
W	2.311	2.31 - 2.34	2.24 - 2.39	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.12 - 3.15	2.92 - 3.43	PASS	
P	n/a	n/a	n/a - n/a	n/a	
R	93.663	94.49 - 94.51	92.87 - 94.46	WARNING	+0.03



(*) Optical Dimensions (measuread in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 30	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

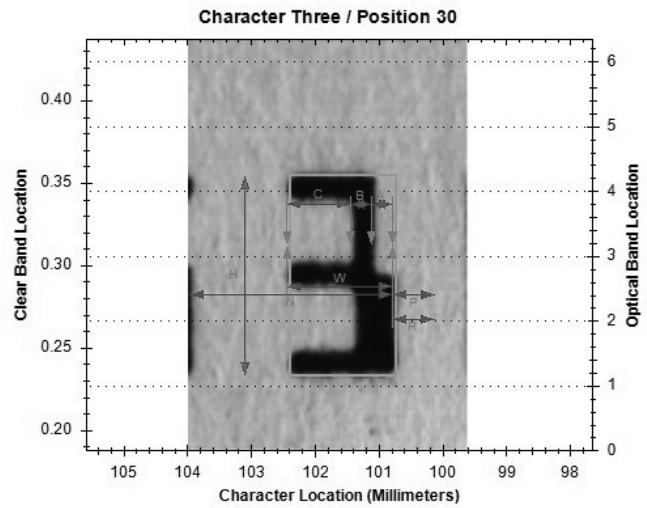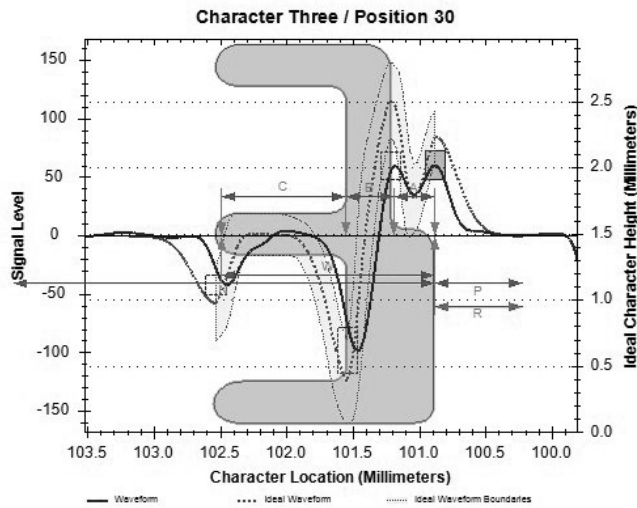

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 71.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.310	0.30	0.23 - 0.39	YES	
B	0.361	0.28	0.28 - 0.44	YES	
C	0.937	0.99	0.86 - 1.01	YES	
W	1.608	1.57	1.53 - 1.68	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.16	2.92 - 3.43	YES	
P	3.175	3.18	2.92 - 3.43	YES	
R	100.013	100.88	99.22 - 100.81	NO	+0.08

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.330	0.25 - 0.28	0.25 - 0.41	PASS	
C	0.991	0.99 - 1.02	0.91 - 1.07	PASS	
W	1.651	1.65 - 1.68	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
P	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
R	100.013	100.79 - 100.81	99.22 - 100.81	PASS	




(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 31	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.12. Expected maximum 3.05.

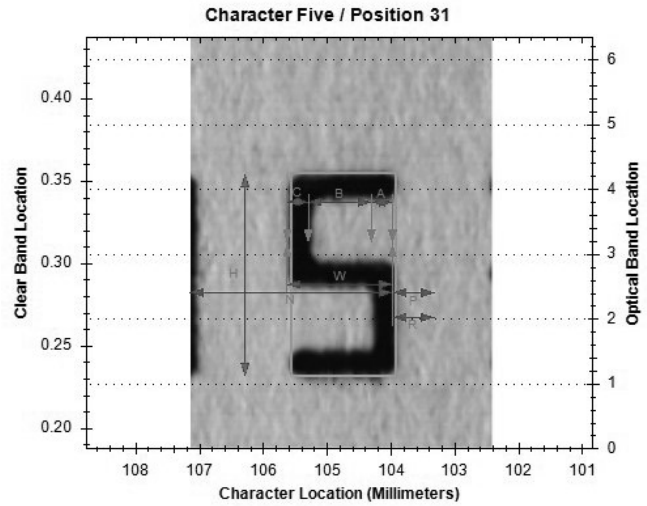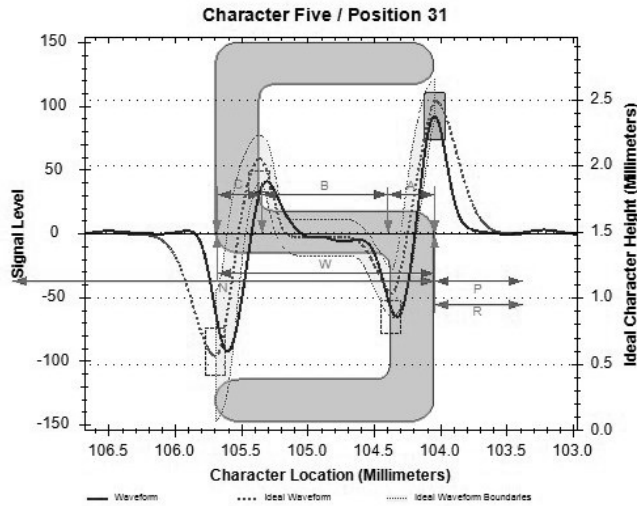

Magnetic Recognition. Signal Level 88.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.28	0.27 - 0.43	YES	
B	0.950	0.98	0.87 - 1.03	YES	
C	0.340	0.30	0.26 - 0.42	YES	
W	1.641	1.56	1.56 - 1.72	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	1.56	2.92 - 3.43	NO	-1.36
P	3.175	3.16	2.92 - 3.43	YES	
R	103.188	104.05	102.39 - 103.98	NO	+0.07

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
B	0.991	0.97 - 0.99	0.91 - 1.07	PASS	
C	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.651	1.65 - 1.68	1.57 - 1.73	PASS	
H	2.972	3.12 - 3.15	2.90 - 3.05	FAIL	+0.08
N	3.175	3.10 - 3.12	2.92 - 3.43	PASS	
P	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
R	103.188	103.96 - 103.99	102.39 - 103.98	PASS	



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 32	Recognition	Category	Error	Description
	Magnetic	Unrecognized Characters (magnetic)	Unrecognized character	Cannot recognize a character. Inspect for extraneous ink and/or voids.
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

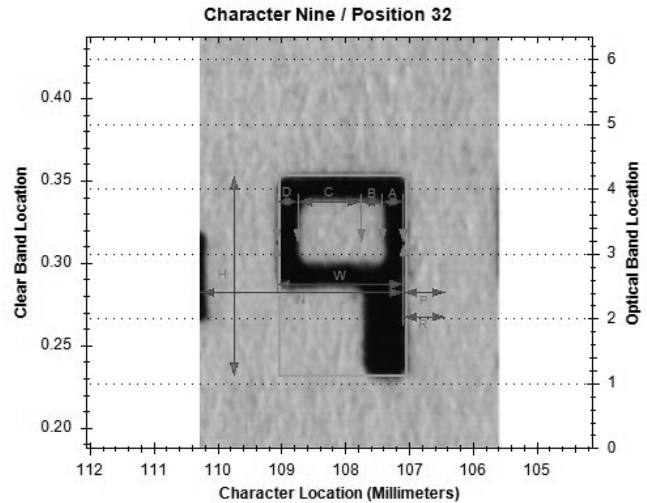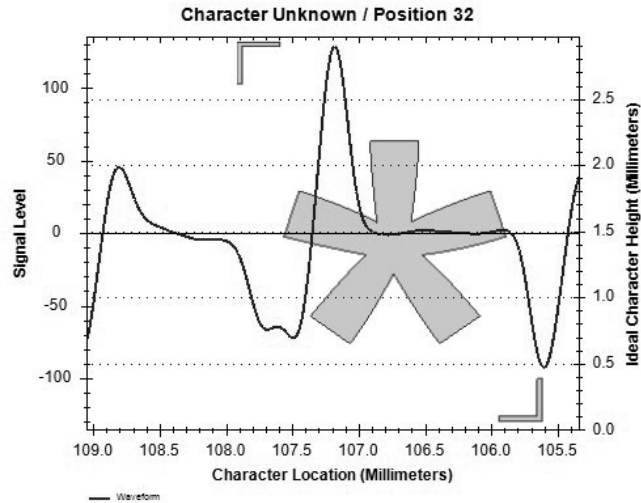

Magnetic	3 2 5 5 1 6 3 0	5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0	5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 0.
Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
B	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
C	0.991	1.07 - 1.09	0.91 - 1.07	PASS	
D	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	1.981	1.98 - 2.01	1.91 - 2.06	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.12 - 3.15	2.92 - 3.43	PASS	
P	3.175	3.10 - 3.12	2.92 - 3.43	PASS	
R	106.363	107.09 - 107.11	105.57 - 107.16	PASS	



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 35	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

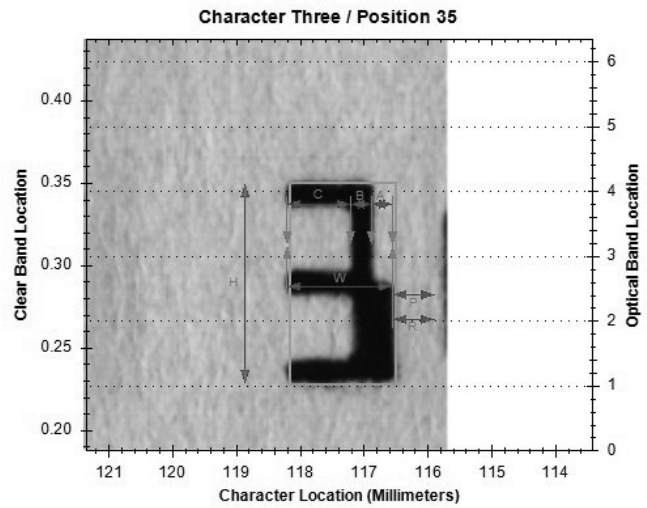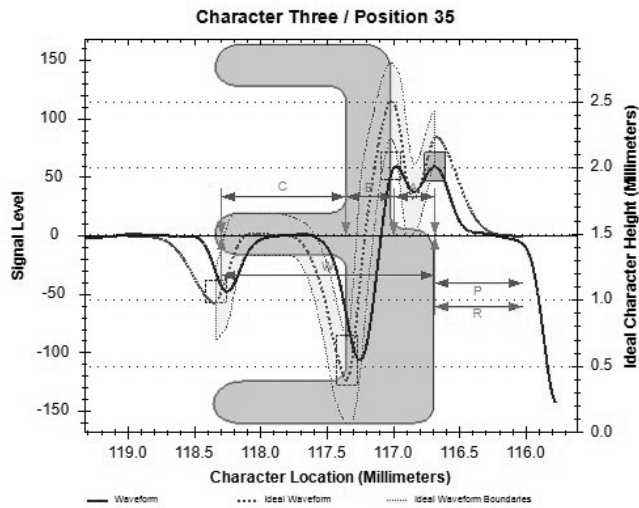

Magnetic	3 2 5 5 1 6	3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6	3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0
	60 55 50 45 40	30 25 20 15 10 5 0

Magnetic Recognition. Signal Level 70.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.310	0.29	0.23 - 0.39	YES	
B	0.361	0.28	0.28 - 0.44	YES	
C	0.937	1.00	0.86 - 1.01	YES	
W	1.608	1.56	1.53 - 1.68	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.24	2.92 - 3.43	YES	
R	115.888	116.69	115.09 - 116.68	NO	+0.01

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
C	0.991	0.99 - 1.02	0.91 - 1.07	PASS	
W	1.651	1.65 - 1.68	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	n/a	n/a	n/a - n/a	n/a	
P	3.175	3.20 - 3.23	2.92 - 3.43	PASS	
R	115.888	116.54 - 116.56	115.09 - 116.68	PASS	




(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 40	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

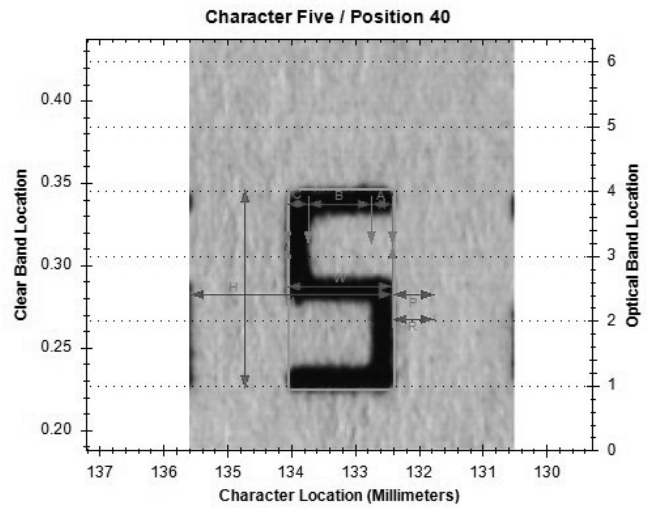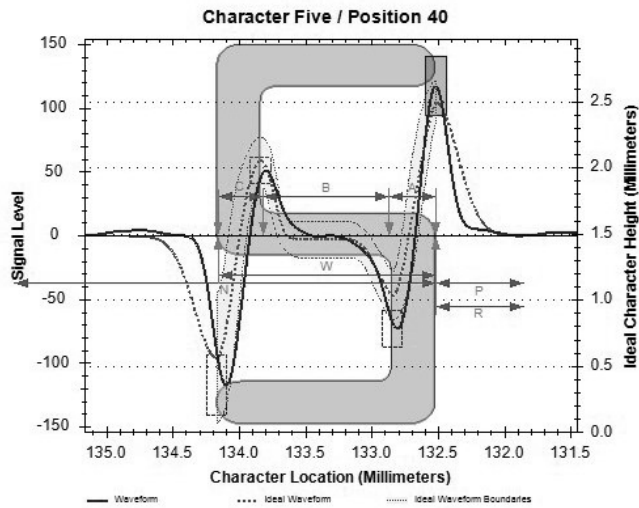

Magnetic Recognition. Signal Level 112.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.29	0.27 - 0.43	YES	
B	0.950	0.99	0.87 - 1.03	YES	
C	0.340	0.30	0.26 - 0.42	YES	
W	1.641	1.58	1.56 - 1.72	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.17	2.92 - 3.43	YES	
P	3.175	3.18	2.92 - 3.43	YES	
R	131.763	132.52	130.97 - 132.56	YES	

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.991	0.97 - 0.99	0.91 - 1.07	PASS	
C	0.330	0.33 - 0.36	0.25 - 0.41	PASS	
W	1.651	1.65 - 1.68	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
P	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
R	131.763	132.41 - 132.44	130.97 - 132.56	PASS	




(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 41	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

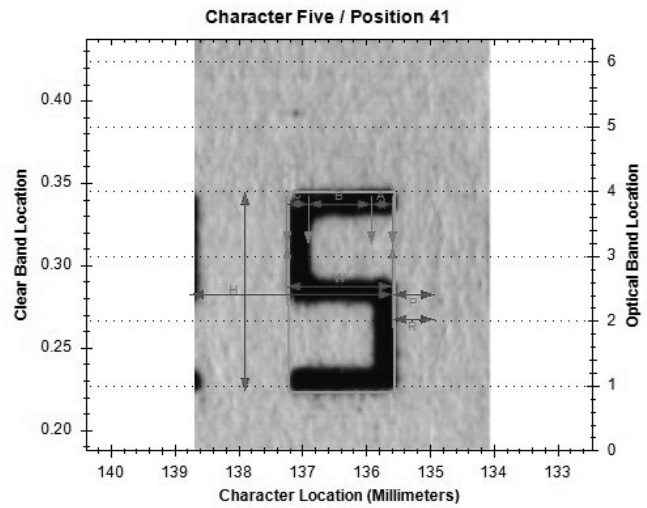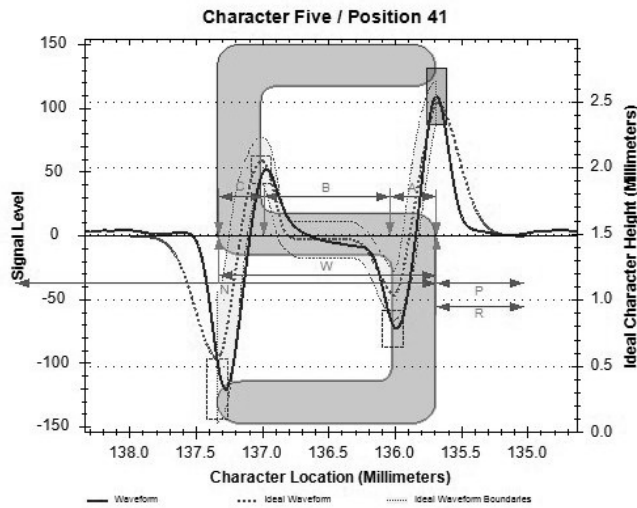

Magnetic Recognition. Signal Level 105.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.30	0.27 - 0.43	YES	
B	0.950	0.98	0.87 - 1.03	YES	
C	0.340	0.31	0.26 - 0.42	YES	
W	1.641	1.59	1.56 - 1.72	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.09	2.92 - 3.43	YES	
P	3.175	3.17	2.92 - 3.43	YES	
R	134.938	135.69	134.14 - 135.73	YES	

(*) Magnetic Dimensions (measuread in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.991	0.99 - 1.02	0.91 - 1.07	PASS	
C	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
W	1.651	1.65 - 1.68	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.10 - 3.12	2.92 - 3.43	PASS	
P	3.175	3.15 - 3.18	2.92 - 3.43	PASS	
R	134.938	135.59 - 135.61	134.14 - 135.73	PASS	



(*) Optical Dimensions (measuread in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 42	Recognition	Category	Error	Description
	optical	Character Dimensions	Wide Character	Actual value 1.42. Expected maximum 1.4.
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.
	Recognition	Category	Warning	Description
	Magnetic	Character Dimensions	Interval B - too wide	Actual value 0.71. Expected maximum 0.7.

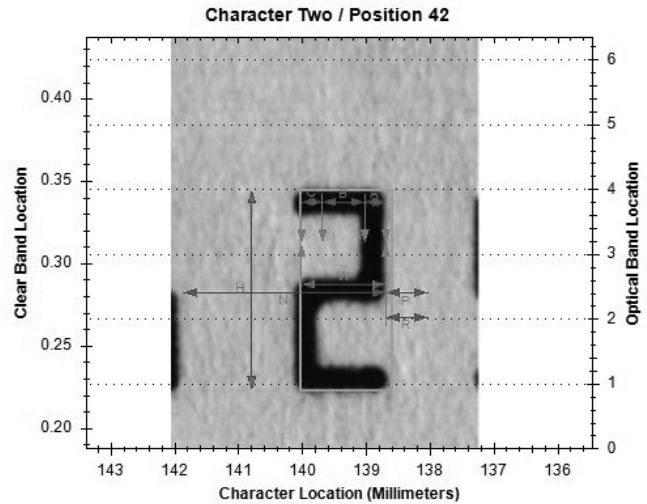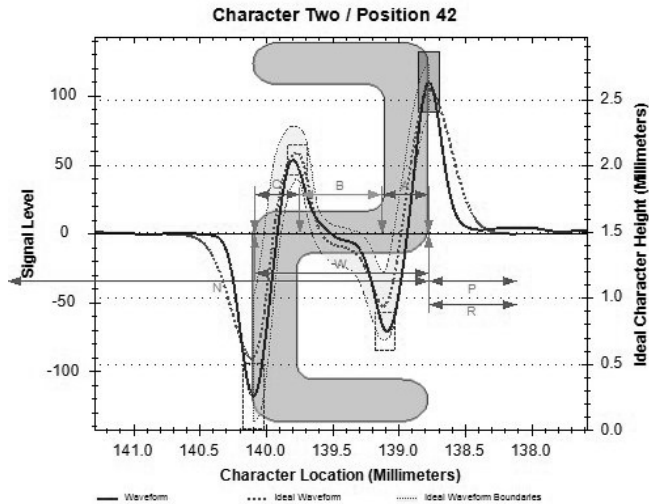

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 105.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.351	0.31	0.27 - 0.43	YES	
B	0.620	0.71	0.54 - 0.70	WARNING	+0.02
C	0.340	0.30	0.26 - 0.42	YES	
W	1.311	1.32	1.23 - 1.39	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.25	2.92 - 3.43	YES	
P	3.175	3.09	2.92 - 3.43	YES	
R	138.113	138.78	137.32 - 138.91	YES	

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.30 - 0.33	0.25 - 0.41	PASS	
B	0.660	0.69 - 0.71	0.58 - 0.74	PASS	
C	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
W	1.321	1.42 - 1.45	1.24 - 1.40	FAIL	+0.04
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.23 - 3.25	2.92 - 3.43	PASS	
P	3.175	3.10 - 3.12	2.92 - 3.43	PASS	
R	138.113	138.68 - 138.71	137.32 - 138.91	PASS	



(*) Optical Dimensions (measured in millimeters)

MICR: FAIL. IMAGE: FAIL.

Document: QCX Test.qcxp

Printed: 29-Jul-19 8:48:28 AM

Position 43	Recognition	Category	Error	Description
	optical	Character Dimensions	Tall Character	Actual value 3.07. Expected maximum 3.05.

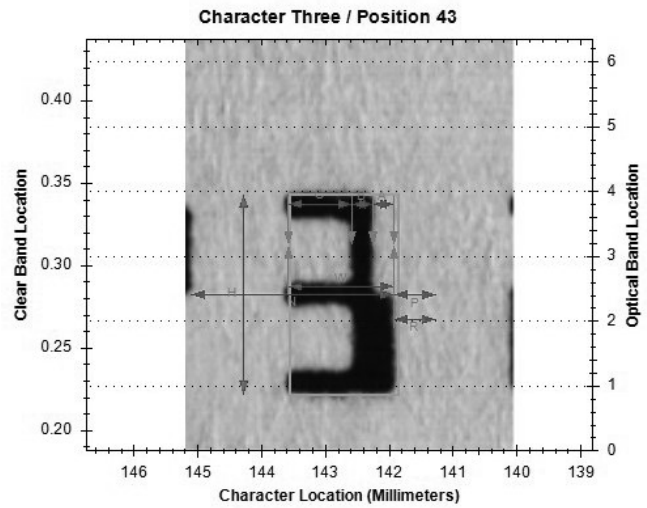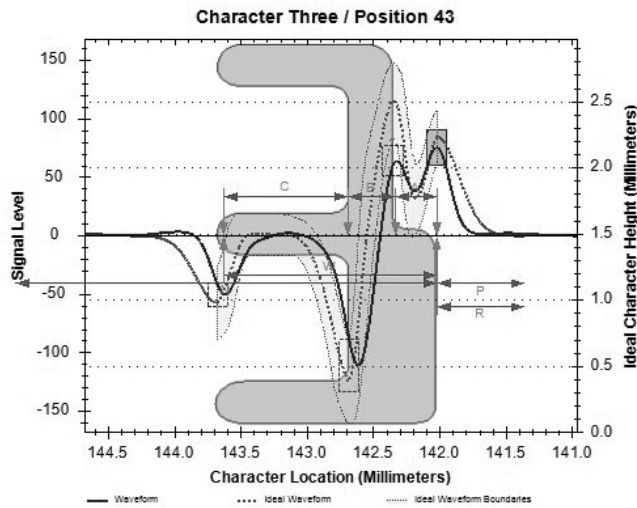

Magnetic	3 2 5 5 1 6 3 0 ? 5 3 6 0 0 6 1 7 6 1 8 1 0
Optical	3 2 5 5 1 6 3 0 9 5 3 6 0 0 6 1 7 6 1 8 1 0

Magnetic Recognition. Signal Level 89.

Dimension	Ideal	Actual	Allowable Range	Within Range	Variance
A	0.310	0.30	0.23 - 0.39	YES	
B	0.361	0.29	0.28 - 0.44	YES	
C	0.937	1.00	0.86 - 1.01	YES	
W	1.608	1.60	1.53 - 1.68	YES	
H	n/a	n/a	n/a - n/a	n/a	
N	3.175	3.16	2.92 - 3.43	YES	
P	3.175	3.25	2.92 - 3.43	YES	
R	141.288	142.02	140.49 - 142.08	YES	

(*) Magnetic Dimensions (measured in millimeters). Using Magnetic Peak Displacement from the Ideal Optical Edge.

Optical Recognition.

Dimension	Ideal	Actual	Allowable Range	PASS	Variance
A	0.330	0.33 - 0.36	0.25 - 0.41	PASS	
B	0.330	0.28 - 0.30	0.25 - 0.41	PASS	
C	0.991	0.99 - 1.02	0.91 - 1.07	PASS	
W	1.651	1.68 - 1.70	1.57 - 1.73	PASS	
H	2.972	3.07 - 3.10	2.90 - 3.05	FAIL	+0.04
N	3.175	3.18 - 3.20	2.92 - 3.43	PASS	
P	3.175	3.23 - 3.25	2.92 - 3.43	PASS	
R	141.288	141.91 - 141.94	140.49 - 142.08	PASS	

(*) Optical Dimensions (measured in millimeters)